


RE-PROGRAMMING YOUR REPAIRED

PANASONIC 3050 HEADSET OR 3020 BELT PACK



- 1 Press the **ID Registration** button on the **center module** (mounted on your wall) for 3 seconds until the LED flashes red.
- 2 Make sure your headset or belt pack has a fully charged battery inserted, then hold down the **T1**, **T2**, and **red power button** on the headset at the same time until you see a flashing yellow light on the headset.
- 3 Release all three buttons.
- 4 Press the **T1** button on your headset, release and wait for the flashing yellow light on the headset to turn solid yellow (could take several seconds).*
*If you want to register multiple headsets at once, repeat steps 2 and 3 before proceeding to step 4.
- 5 When done registering all headsets, press the **ID Registration** button on the center module to end the registration process. The light on your headset(s) will turn solid green.

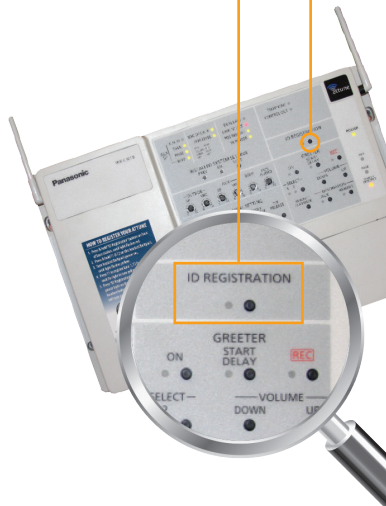

Still having issues? Please call RFT at **(800) 598-2370** for customer support.